


DYWIDAG Electrically Isolated Permanent Strand Anchors



Conforming to Euronorm EN 1537

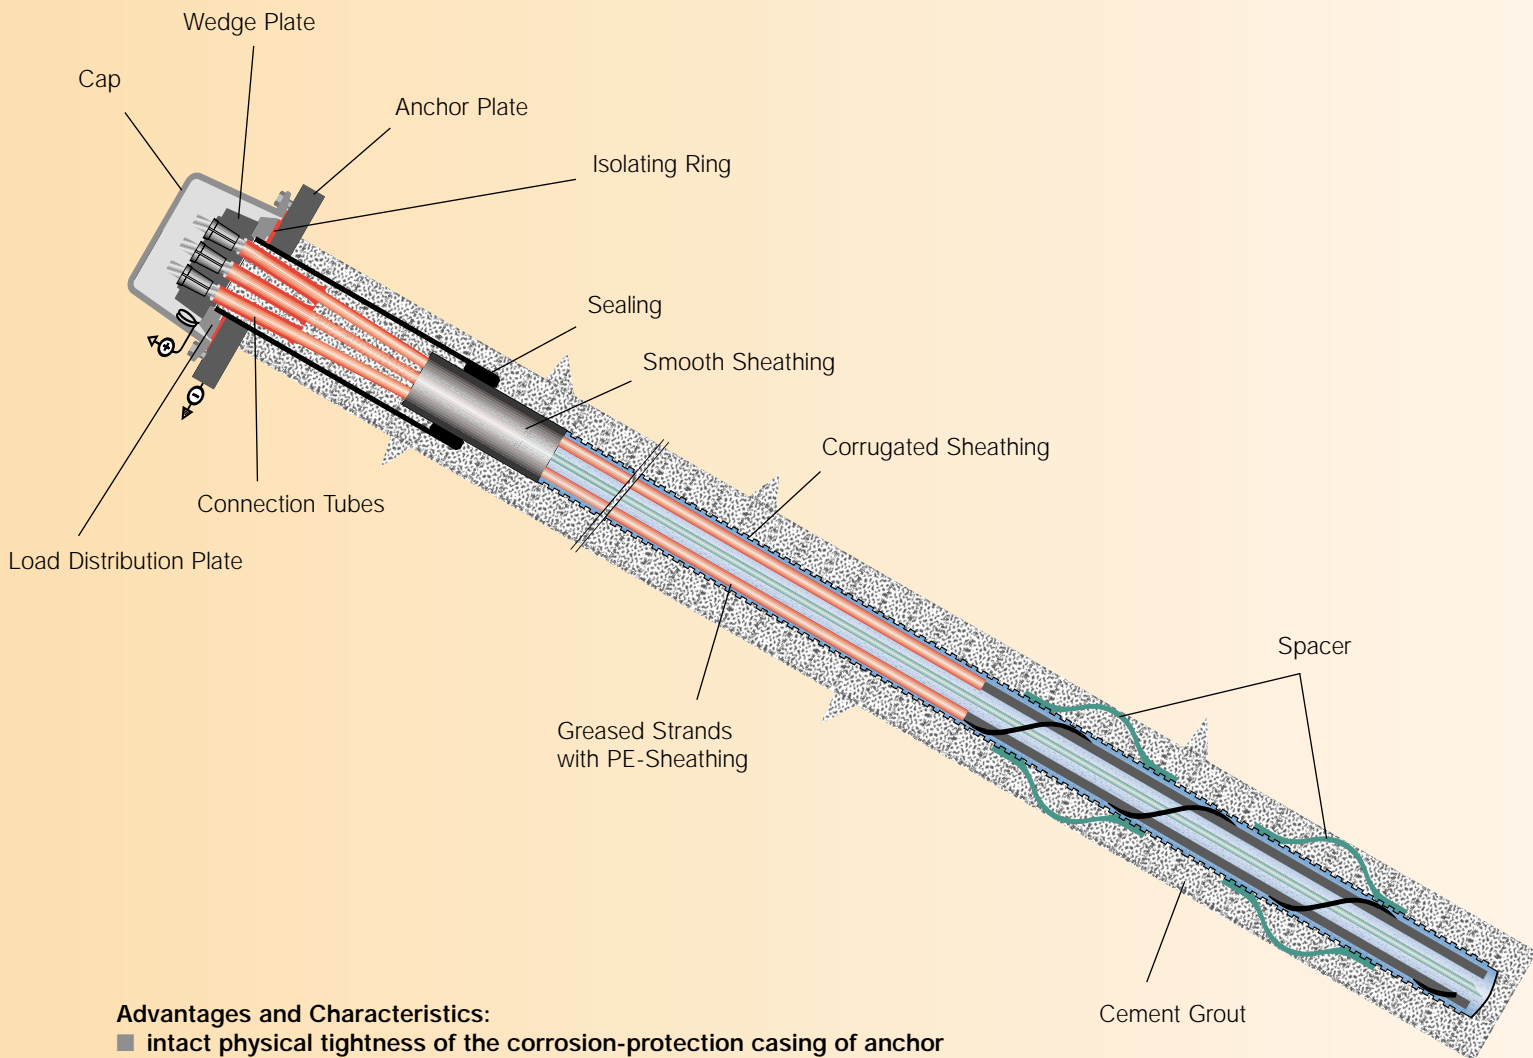

Advantages and Characteristics:

- intact physical tightness of the corrosion-protection casing of anchor
- continuous and sturdy PE ribbed lining
- additional sealing at the anchor base
- insulation of anchor head and anchor plate
- permanent testability through electrical measurement of resistance by means of an ohmmeter before installation, prestressing and during the life span of the anchor
- quality safety and control for the client

Supply:

2-12 strands 0.6", 0.62"

St 1570/1770 N/mm², St 1670/1860 N/mm²

with or without factory-made primary injection of the bond length



Excavation of parking garage
Giggijoch, Soelden, Austria

Drill equipment for anchors



DSI Group and Europe HQ

**DYWIDAG-SYSTEMS
INTERNATIONAL GMBH**
P.O. Box 810268
81902 Munich, Germany
Erdinger Landstrasse 1
85609 Aschheim
Phone + 49-89-92 67-0
Fax + 49-89-92 67-2 52
E-mail: dsihv@dywidag-systems.com

America HQ

**DYWIDAG-SYSTEMS
INTERNATIONAL USA INC.**
320 Marmon Drive
Bolingbrook, IL 60440
USA
Phone + 1-630-739 1100
Fax + 1-630-972 9604
E-mail: dsiamerica@dsiamerica.com

Asia/Pacific HQ

**DYWIDAG-SYSTEMS
INTERNATIONAL PTY. LIMITED**
Arnall Mining Products Division
25 Pacific Highway
Bennetts Green NSW 2290
Australia
Phone + 61-2-49 48 90 99
Fax + 61-2-49 48 40 87
E-mail: dsi@dywidag.com.au